



DNS Configuration

Use the **F1** button on any page of a ThinManager wizard to launch Help for that page.

Visit www.thinmanager.com/TechNotes4/01_Intro/Manuals.shtml to download the manual, manual chapters, or the abridged ThinManual.


ThinManager allows you to define a Domain Name Server to identify terminal servers instead of relying on IP addresses.

Select **Manage > DNS Configuration** from the ThinManager menu to launch the **Domain Name Server Wizard**.



Domain Name Service Wizard - Introduction


Select the **System using a DNS server** radio button and then the **Next** button to configure DNS.

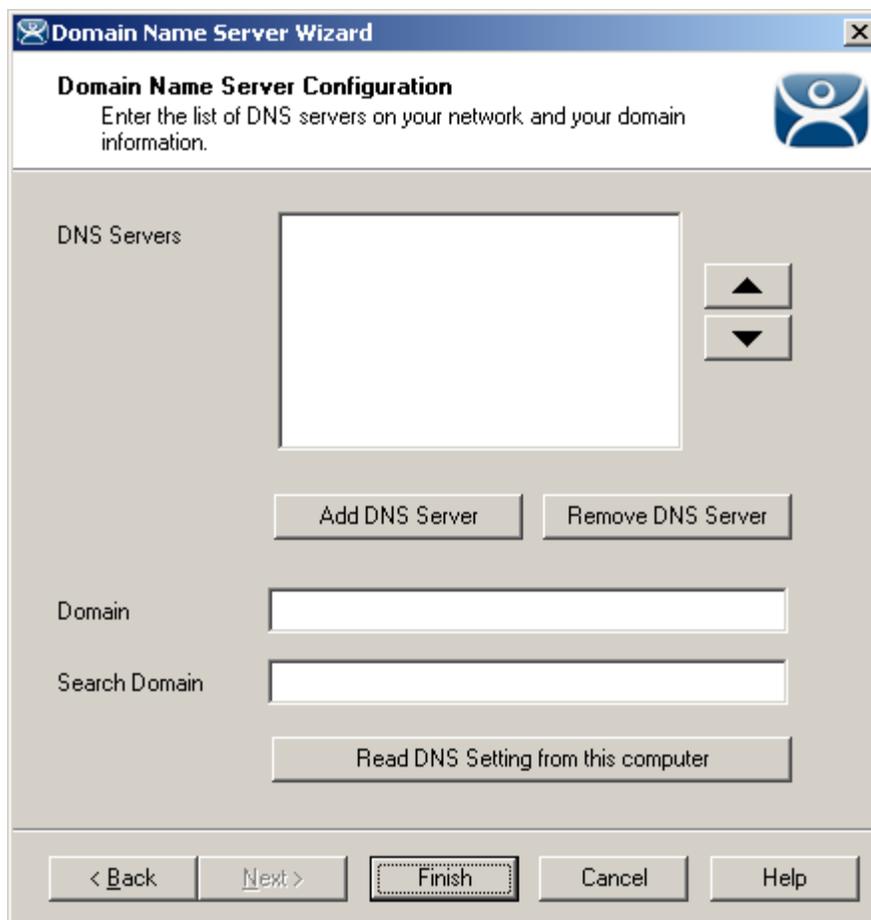

Domain Name Server Configuration

The DNS settings can be added automatically by selecting the **Read DNS Setting from this computer** button. This will transfer the DNS settings from the current computer into ThinManager.

The DNS settings can be manually added by selecting the **Add DNS Server** button to launch a **DNS Server** dialog box that allows the IP address of the DNS server to be entered.

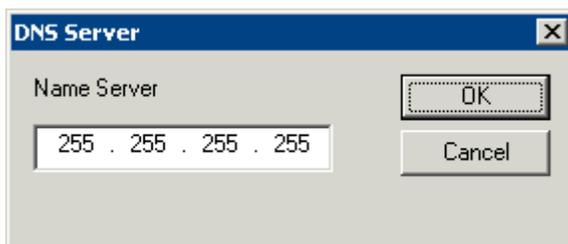

Domain Name Server Configuration - Add DNS Server

Add the IP address of the DNS server into the **DNS Server** dialog and select **OK**. Additional IP addresses can be listed by selecting the **Add DNS Server** button again.

Additional Settings include the **Domain** field is for the DNS domain name and the **Search Domain** field. This field will be added as a prefix to any DNS searches.